


Performance data wall heating dry lining

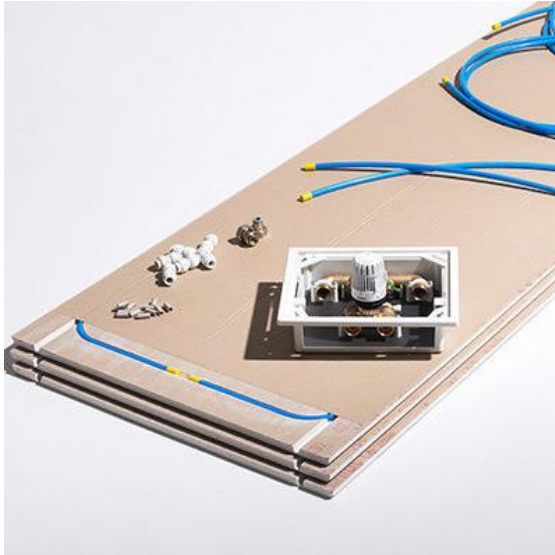


- Installation height: 12.5 mm
- Minimum distance to wall: 40 mm
- 10 mm x 1.1 mm PE-RT pipe
- Plug-in connection with support sleeves
- Oxygen-tight according to DIN 4726
- Distance between heating pipes: 100 mm
- Connection to conventional heating systems with RTL technology
- Offer on plasterboard for damp rooms available on request

Heating capacity [W/m²]

Average heating water temperature*	32°C		37°C		42°C	
Room temperature	20°C	24°C	20°C	24°C	20°C	24°C
Heating capacity [W/m ²]	35	23	50	38	66	53

* for FLEXIRO wall heating, a ΔT of 5K between flow and return is recommended.

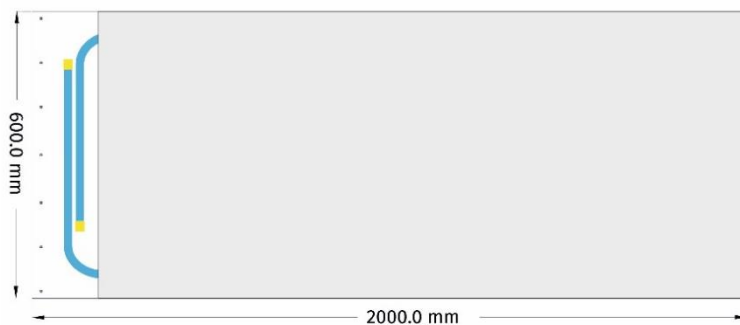

Board dimensions

Wall heating element 2000 mm x 600 mm x 12.5 mm

Standard gypsum plasterboards with a thickness of 12.5 mm can be used for the planking of the inactive wall surfaces.

Installation instructions →